

High Pressure Cryogenic Safety Valve

Parameters

PN: 32MPa

DN: Ø15


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.66



This kind of product has certified by EAC, TS
Standards: GB/T 29026, TR CU 032/2013

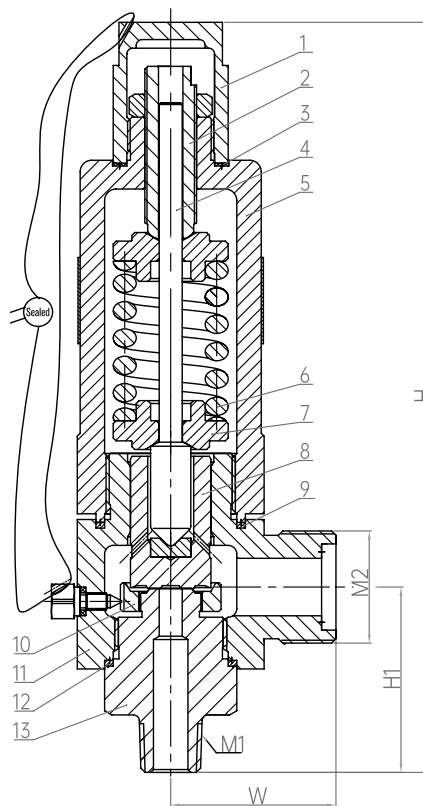

Materials

1 Cover	HPb59-1	6 Spring	S30210	11 Body	S30408
2 Adjusting Screw	HPb59-1	7 Spring Seat	S30408	12 Sealing	T2
3 Gasket	PTFE	8 Disc	S32168	13 Valve Seat	S32168
4 Ejector Bar	S42020	9 Sealing	T2		
5 Bonnet	S30408	10 Adjusting Ring	HPb59-1		

Model No.	Specifications & Dimensions (mm)						Pressure Adjusting Range (MPa)	Weight(kg)
	H	H1	D0	W	M1	M2		
DGA-15.B01	261	64.5	Ø8	57.5	NPT 1/2	M39×2	11 ~ 19.9	
DGA-15.B02							20 ~ 28	
DGA-15.B03							5 ~ 10.9	