




Cryogenic Relief Valve

Parameters

DN: Ø8
Design Temp.: -196°C ~+80°C
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

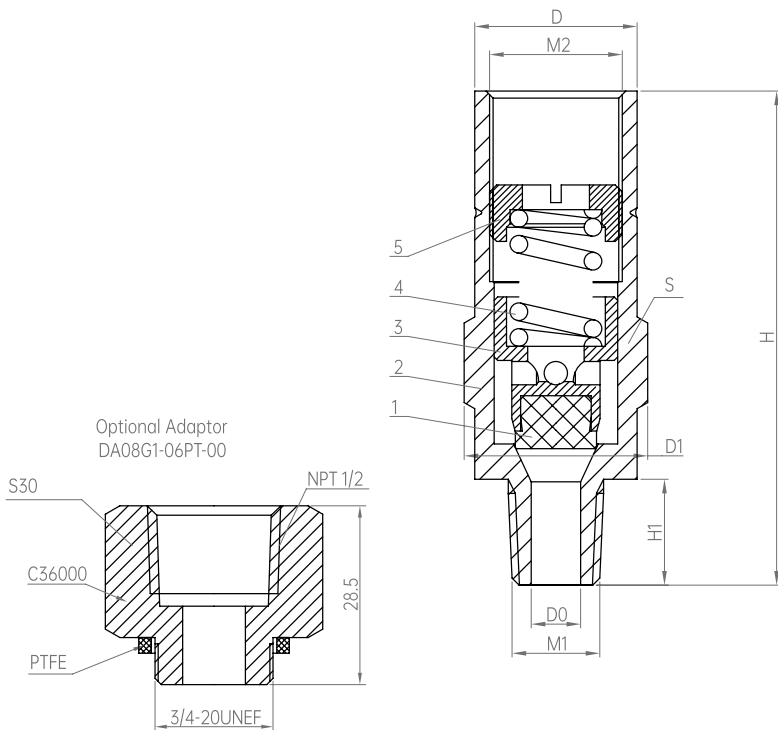

Materials

- | | | | | | |
|---|--------|--------|---|---------------|--------|
| 1 | Gasket | PFA | 4 | Spring | S30210 |
| 2 | Body | C36000 | 5 | Adjusting Nut | C36000 |
| 3 | Disc | C36000 | | | |

Remarks: **DA-08G.99.xxx**

Set pressure (bar)

Model No.	Specifications & Dimensions (mm)							Nominal pressure (Mpa)	Set pressure (Mpa)	Weight(kg)
	H	H1	D0	D1	S	M1	M2			
DA-08.99.xxx	70	15	Ø7	Ø26	24	NPT1/4	3/4-20UNEF	4.0	0.4 ~ 4.0	0.2
DA-08G.99.xxx	71	16	Ø8	Ø26	24	NPT1/4	3/4-20UNEF	4.0	0.4 ~ 4.0	0.2