


Cryogenic Safety Valve

Parameters

PN: 4.0MPa
DN: Ø10
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂
Flow Coefficient: 0.29



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

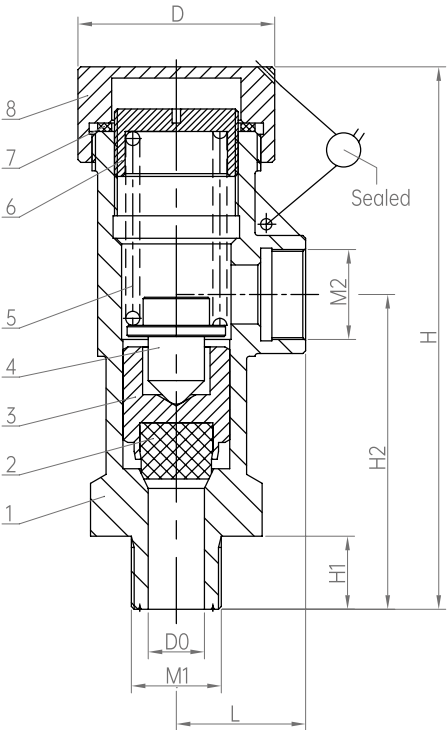

Materials

1	Body	CF8	5	Spring	S30210
2	Gasket	PTFE+MoS2	6	Adjusting Nut	HPb59-1
3	Disc	HPb59-1	7	Gasket	PTFE
4	Spring Seat	HPb59-1	8	Cover	S30408

Model No.	Specifications & Dimensions (mm)								Set Pressure (MPa)	Weight(kg)
	H	H1	H2	D0	D	L	M1	M2		
DA-10	96	13	56	Ø10	Ø35	23	M16x1	M16x1	1.01 ~ 1.9	0.7
DA-10A									0.31 ~ 1.0	0.7
DA-10C2									1.91 ~ 3.5	0.7