



Cryogenic Globe Valve Vacuum Jacketed


Parameters

PN: 4.0MPa
DN: Ø15
Design Temp.: -196℃ ~+80℃
Media: LNG. LO₂. LN₂. LAr. CO₂

Connection : Socket Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24925, TR CU 032/2013

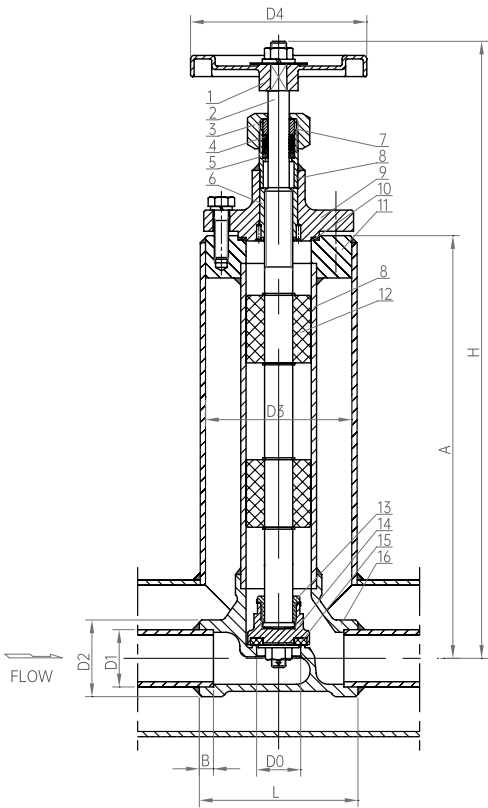

Materials

1	Hand Wheel	Y102	7	Gland	HPb59-1	13	Connecting Nut	S30408
2	Stem	S30408	8	Connecting Pipe	S30408	14	Disc	S30408
3	Gland Nut	S30408	9	Bonnet	CF8	15	Disc Sealing	PCTFE
4	Washer	PTFE	10	Washer	RPTFE	16	Body	CF8
5	Washer	HPb59-1	11	Flange	S30408			
6	Bushing	HPb59-1	12	Pilot Sleeve	PTFE			

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H Opening	H Closing	A	B	L	D0	D1	D2	D3	D4	
DZJ-15Y	359	345	250	6	65	Ø15	Ø22.2	Ø29.5	Ø63	Ø80	2.2