

Cryogenic Globe Valve Vacuum Jacketed Angle Type

Parameters

PN: 4.0MPa

DN: Ø40~Ø50


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24925, TR CU 032/2013

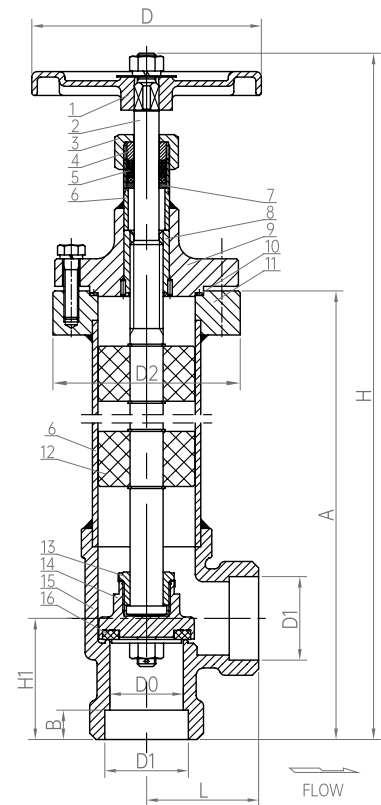

Materials

1 Hand Wheel	Y102	7 Washer	HPb59-1	13 Connecting Nut	S30408
2 Stem	S30408	8 Bushing	HPb59-1	14 Disc	S30408
3 Gland Nut	S30408	9 Bonnet	CF8	15 Body	CF8
4 Gland	HPb59-1	10 Washer	RCTFE	16 Disc Sealing	PCTFE
5 Washer	PTFE	11 Flange	S30408		
6 Connecting Pipe	S30408	12 Pilot Sleeve	PTFE		

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H Opening	H Closing	A	B	L	D0	D1	D2	D3	D4	
DZJ-40J	479.5	465	66	336	15	61	Ø125	Ø40	Ø45.5	Ø101	
DZJ-50J	490.5	475.5	70	334.5	15	70	Ø140	Ø50	Ø57.5	Ø126	