



Cryogenic Check Valve Vacuum Jacketed

Parameters

PN: 4.0MPa

DN: Ø15~Ø50


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld



This kind of product has certified by EAC and TS
Standards: GB/T 24925, TR CU 032/2013

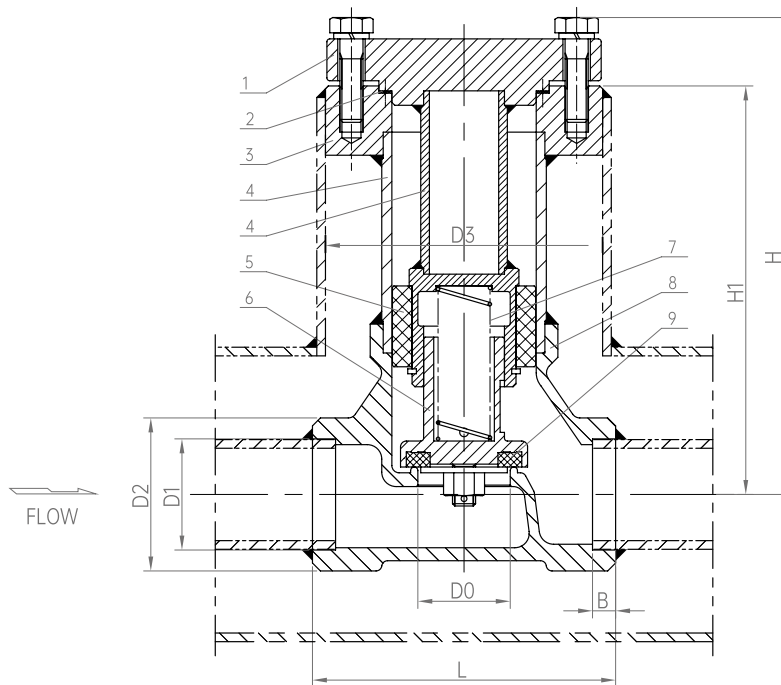

Materials

1 Bonnet	S30408	4 Connecting Pipe	S30408	7 Spring	S30210
2 Washer	RPTFE	5 Pilot Sleeve	PTFE	8 Body	CF8
3 Flange	S30408	6 Disc	S30408	9 Disc Sealing	PCTFE

Model No.	Specifications & Dimensions (mm)								Weight(kg)
	H	H1	B	L	D0	D1	D2	D3	
DZH-15C	202	181	6	65	Ø15	Ø18.5	Ø29.5	Ø63	
DZH-25C	262.5	240	8	90	Ø25	Ø32.5	Ø43.5	Ø82	3.2
DZH-32C	273.5	250	8	105	Ø32	Ø38.5	Ø53	Ø101	
DZH-40C	310	286	8	120	Ø40	Ø45.5	Ø62	Ø101	
DZH-50C	315.5	290	10	140	Ø50	Ø57.5	Ø72	Ø126	