

DH41F-63P

Cryogenic Check Valve Uplift Type

Parameters

PN: 6.3MPa


DN: Ø10~Ø50

Design Temp.: -196℃ ~+80℃

Media: LNG, LO₂, LN₂, LAr.

Connection :

Flanged connection with PN 40

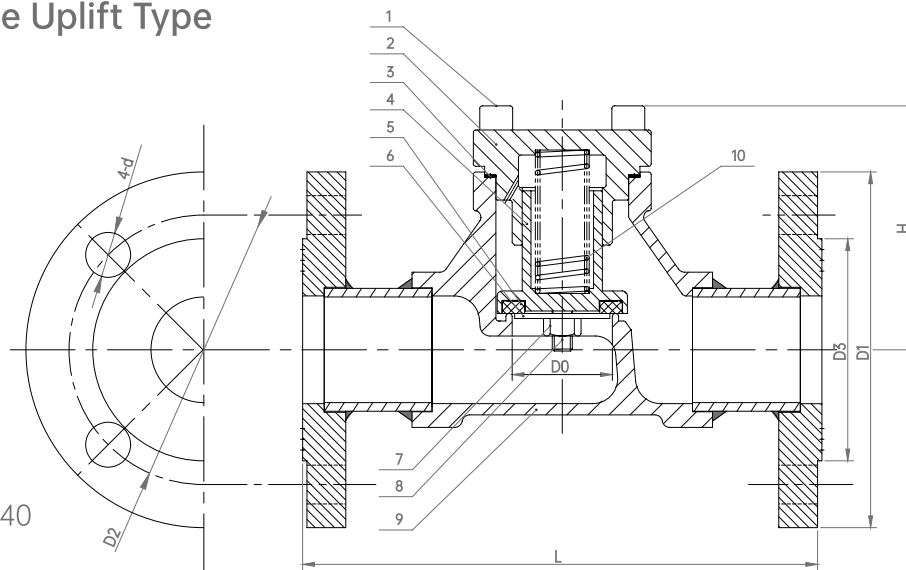

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Hexagon Screw	S30408	5	Disc Sealing	PTFE	8	Split Pin	S30408
2	Bonnet	CF8	6	Gasket	S30408	9	Body	CF8
3	Gasket	RPTFE	7	Hexagon Nut	S30408	10	Spring	S30210
4	Disc	S30408						

Model No.	Specifications & Dimensions (mm)							Weight(kg)
	H	D0	D1	D2	D3	d	L	
DH-20F	70	Ø20	Ø105	Ø75	Ø58	Ø14	154	
DH-25F	77	Ø25	Ø115	Ø85	Ø68	Ø14	166	
DH-32F	89	Ø32	Ø140	Ø100	Ø78	Ø18	185	
DH-40F	98	Ø40	Ø150	Ø110	Ø88	Ø18	214	
DH-50F	111	Ø50	Ø165	Ø125	Ø102	Ø18	240	