


DH61F-40P

Cryogenic Check Valve Uplift Type

Parameters

PN: 4.0MPa
DN: Ø65~Ø100
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr
Connection : Butt Weld

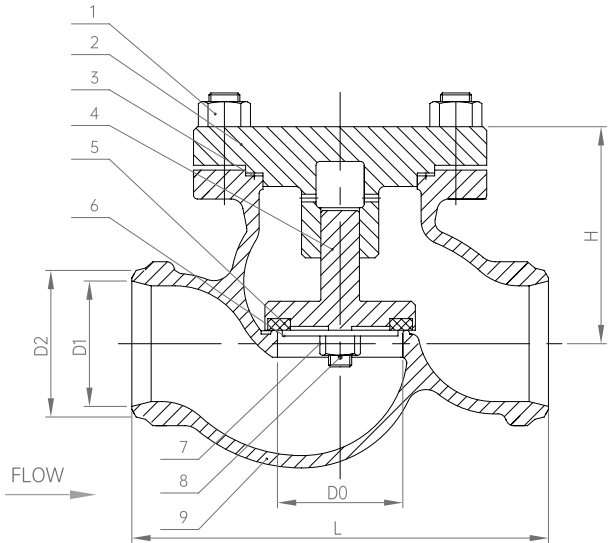

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Hexagon Screw	S30408	6	Gasket	S30408
2	Bonnet	CF8	7	Hexagon Nut	S30408
3	Gasket	RPTFE	8	Split Pin	S30408
4	Disc	S30408	9	Body	CF8
5	Disc Sealing	PTFE			

Model No.	Specifications & Dimensions (mm)					Weight(kg)
	H	L	D0	D1	D2	
DH-65	112	216	Ø65	Ø70	Ø76	10.0
DH-80	118	241	Ø80	Ø81	Ø89	13.9
DH-100	138	292	Ø100	Ø100	Ø108	
DH-100C	138	275	Ø100	Ø106.3	Ø114.3	