


High Pressure Cryogenic Check Valve

Parameters

PN: 32MPa
DN: Ø20
Design Temp.: -196℃ ~+80℃
Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld

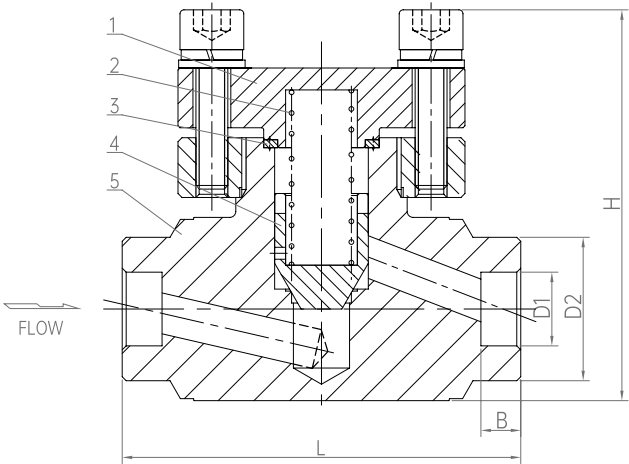

Materials

1	Bonnet	S30408	3	Gasket	T2	5	Body	S30408
2	Spring	S30210	4	Disc	S30408			

Model No.	Specifications & Dimensions (mm)						Weight(kg)
	H	L	B	D0	D1	D2	
DGH-20B	98	100	12.5	Ø20	Ø26	Ø36	
DGH-20B1	98	100	12.5	Ø20	Ø25.5	Ø36	