

High Pressure Emergency Shut-off Valve

Parameters


PN: 32MPa

DN: Ø10~Ø25

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld

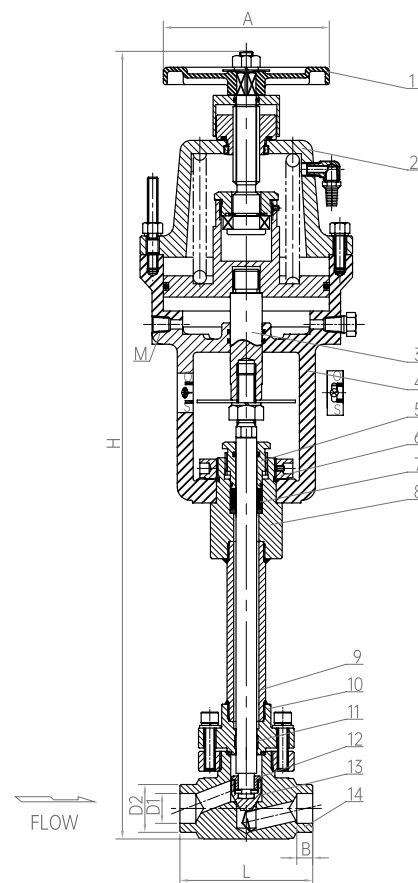

Materials

1 Hand Wheel	Y102	6 Cylinder	S30408	11 Bonnet	PTFE
2 Cylinder	ZL104	7 Gland Nut	PTFE	12 Connecting Nut	S30408
3 Cover	S30408	8 Washer	S30408	13 Disc	S30408
4 Connecting	ZL104	9 Gland Packings	S30408	14 Body	S30408
5 Shaft	S30408	10 Connecting Pipe	S30408		

Model No.	Specifications & Dimensions (mm)								Weight(kg)
	H	A	L	B	M	D0	D1	D2	
DGQ-10	593	Ø140	100	10	Rc1/4	Ø10	Ø18.5	Ø36	
DGQ-15	593	Ø140	100	12	Rc1/4	Ø15	Ø22.5	Ø36	
DGQ-20	593	Ø140	100	12	Rc1/4	Ø20	Ø27.5	Ø36	
DGQ-25	663	Ø140	128	12.5	Rc1/4	Ø25	Ø32.5	Ø46	