



# Cryogenic Diverter Valve

## Parameters

PN: 4.0MPa


DN: Ø25

Design Temp.: -196°C ~+80°C

Media: LNG, LO<sub>2</sub>, LN<sub>2</sub>, LAr, CO<sub>2</sub>



This kind of product has certified by CE, EAC, TS and CCS  
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

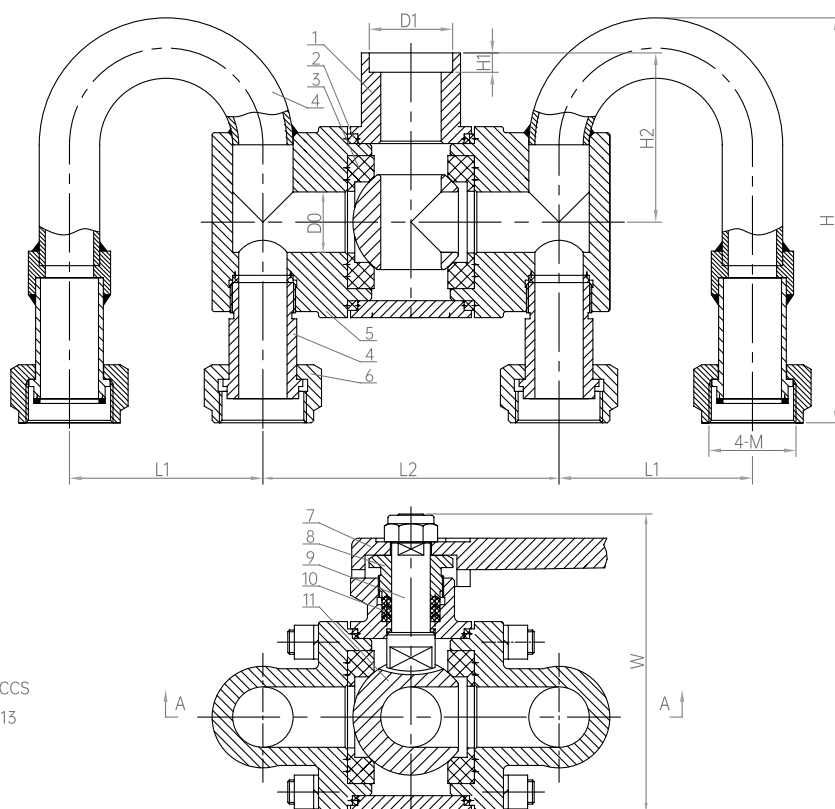

## Materials

|   |             |        |   |            |         |    |        |        |
|---|-------------|--------|---|------------|---------|----|--------|--------|
| 1 | Body        | CF8    | 5 | Bonnet     | CF8     | 9  | Stem   | S30408 |
| 2 | Washer      | PTFE   | 6 | Nut        | HPb59-1 | 10 | Gasket | PTFE   |
| 3 | Ball Lining | PTFE+C | 7 | Hand Lever | CF8     | 11 | Ball   | S30408 |
| 4 | Pipe        | S30408 | 8 | Gland Nut  | HPb59-1 |    |        |        |

| Model No. | Specifications & Dimensions (mm) |    |      |       |     |       |    |       |       | Weight(kg) |
|-----------|----------------------------------|----|------|-------|-----|-------|----|-------|-------|------------|
|           | H                                | H1 | H2   | W     | D0  | D1    | L1 | L2    | M     |            |
| DQS-25C4  | 172                              | 8  | 70.5 | 123.5 | Ø25 | Ø34.5 | 80 | 122.5 | M36×2 | 6.2        |