

Cryogenic Diverter Valve


Parameters

PN: 4.0MPa

DN: Ø25


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

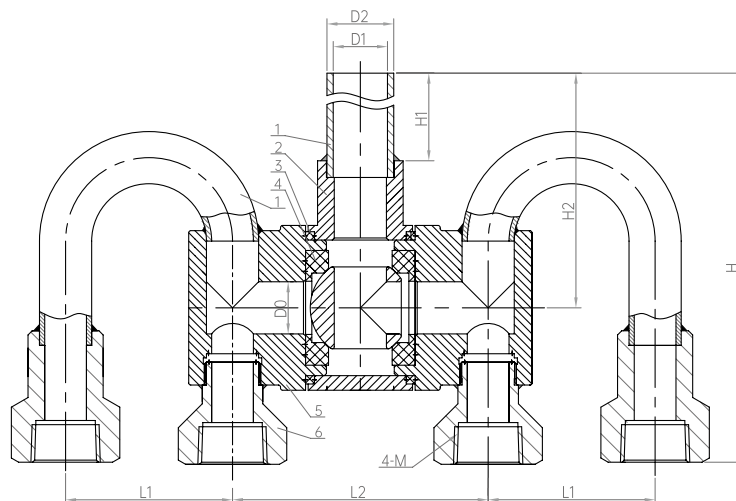

This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

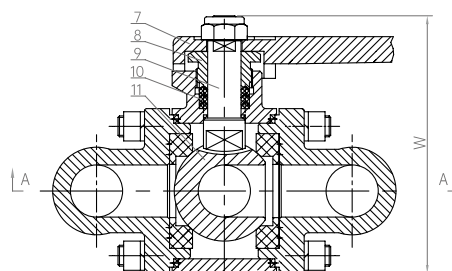

Materials

1	Pipe	S30408	5	Bonnet	CF8	9	Stem	S30408
2	Body	CF8	6	Adaptor	S30408	10	Gasket	PTFE
3	Washer	PTFE	7	Hand Lever	CF8	11	Ball	S30408
4	Ball Lining	PTFE+C	8	Gland Nut	HPb59-1			

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H	H1	H2	W	D0	D1	D2	L1	L2	M	
DQS-25C5	235.5	92	162.5	123.5	Ø25	Ø26	Ø32	102	122.5	NPT 3/4	6.2
DQS-25C7	235.5	92	162.5	123.5	Ø25	Ø26	Ø32	102	122.5	NPT 1	6.4