




DH11F-40P

Cryogenic Check Valve Uplift Type

Parameters

PN: 4.0MPa
DN: Ø10~Ø25
Design Temp.: -196℃ ~+80℃
Media: LNG. LO₂. LN₂. LAr. CO₂

Connection : Thread Connection

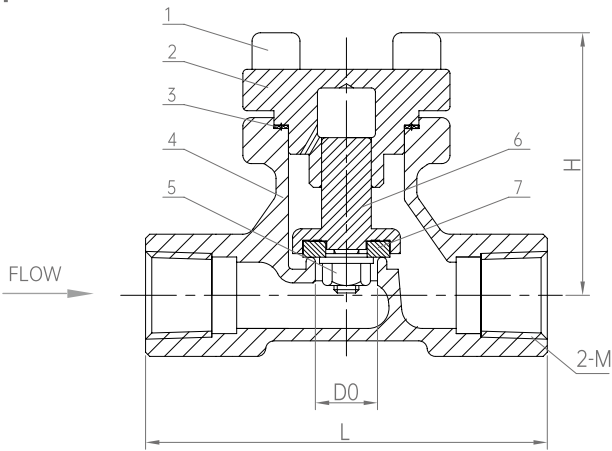

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Screw	S30408	5	Nut	S30408
2	Bonnet	CF8	6	Disc	S30408
3	Gasket	D#9000	7	Gasket	PTFE
4	Body	CF8			

Remarks: **DH-15NPT.98**



Model No.	Specifications & Dimensions (mm)					Weight(kg)
	H	L	D0	M	Cv	
DH-10NPT.98	55	60	13	NPT 3/8	2.0	
DH-15NPT.98	62	65	15	NPT 1/2	2.7	
DH-20NPT.98	70	80	20	NPT 3/4	5.5	
DH-25NPT.98	77	90	25	NPT 1	8.7	