


DN	L	D	A	B	C	øg1	E	F	h2	n-ø
15	170	9	47	75	105	40	20	2	3	4-14

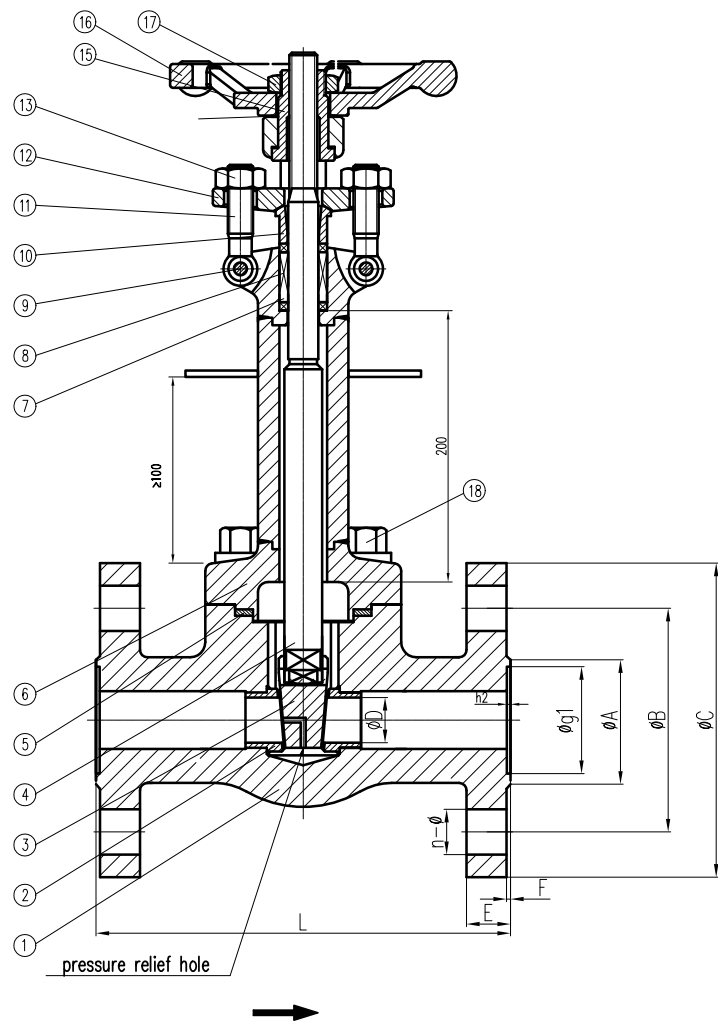

18	Bolt	A320 B8
17	Locking Nut	C.S
16	Handwheel	KTH 330
15	Stem Nut	A276 F304
13	Hex Nut	A194 8
12	Gland Flange	A182 F304
11	Gland Eyebolt	A193 B8
10	Gland	A276 304
9	Pin	A276 304
8	Packing	Graphite-FE
7	Packing	Graphite + SS
6	Bonnet	A182 F304
5	Bonnet Gasket	304+graphite
4	Stem	A276 304
3	Wedge	A182 F304
2	Seat	A276 F304+STL.6
1	Body	A182 F304
NO.	Part Name	Material

Shell Test	15	Mpa	Seat Test (Hyd.)	11	Mpa	Seat Test (Air)	0.6	Mpa
APPLICABLE STANDARDS & TECHNICAL NOTES:				TEMPERATURE(DESIGN):-196~200 °C				
Design: API 602				Face to Face: GB/T 12221				
Inspection & Test: API 598				End Connection: GOST 33259 type F				
REV	DESCRIPTION			Draft	Check	Appr.	Date	
	PONHAN PONHAN VALVE 澎湖阀门			DN	15	Draft	Ryan.Zhang	Aug.25,2025
				PN	100	Check	Seren.Liu	Aug.25,2025
Man.Fig.					Appr.	Bruce.Li	Aug.25,2025	
Type								A.1