


G002

FC

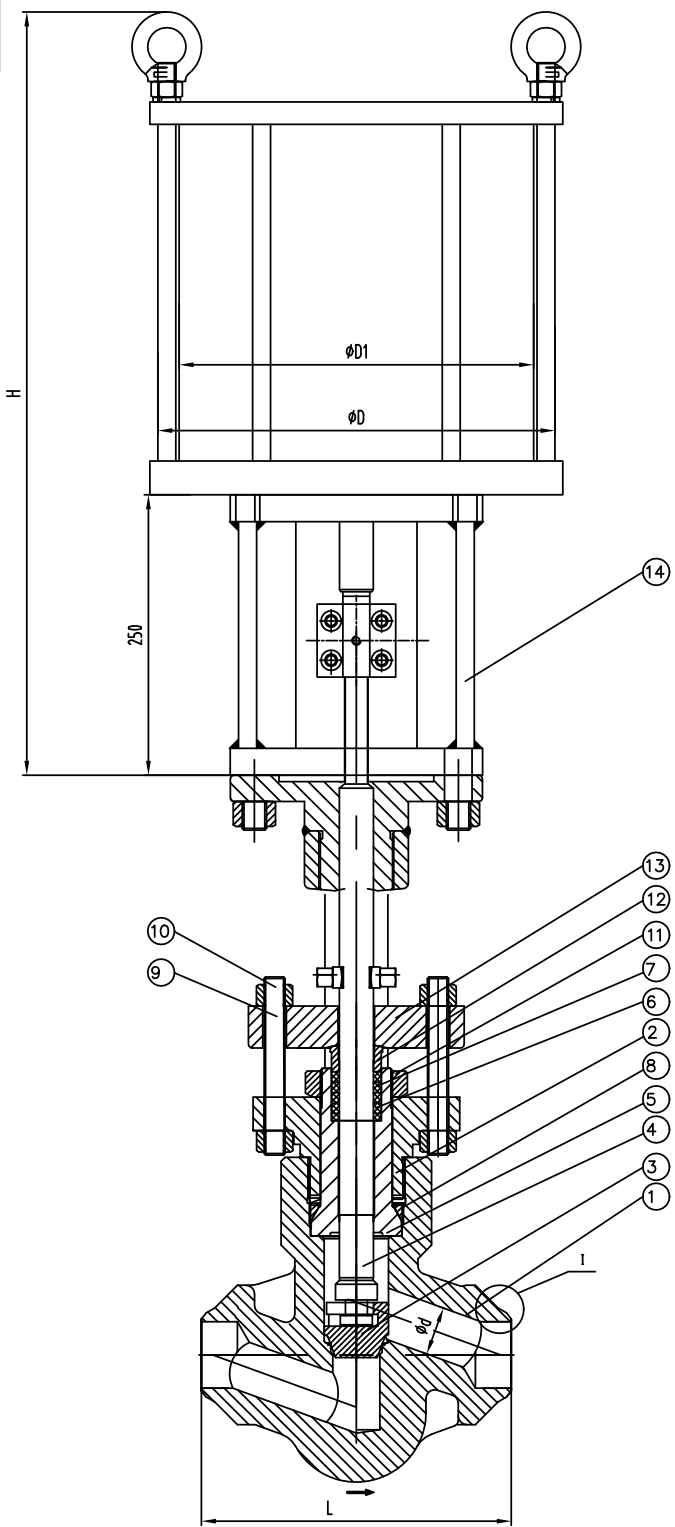

NOTE:
1.Design pressure:30 Mpa

DN	d	L	SCH	A	B	H	D	D1
20	9	186	160	26.7	15.58	680	368	316
25	14	186	160	33.4	20.7	685.2	424	370

NO	NAME	MATERIAL
1	BODY	A182 F316L+STL
2	BONNET	A182 F316L
3	DISC	A182 F316L+STL
4	STEM	A276 316L
5	PACKING BOX	A276 316L
6	PACKING A	API 622
7	PACKING B	API 622
8	PRESSURE RING	A276 316L
9	BOLT	A193 B8M
10	HELIX NUT	A194 8M
11	PRESSURE NUT	A276 316L
12	GLAND	A276 316L
13	GLAND FLANGE	A182 F316L
14	PNEUMATIC ACTUATOR	

Shell Test(Hyd.)		45 Mpa		Seat Test (Hyd.)		33 Mpa		Seat Test (Gas)		0.6 Mpa			
APPLICABLE STANDARDS & TECHNICAL NOTES:						TEMPERATURE(DESIGN): -50~50 °C							
Design: ISO 15761						Face to Face: MFR'S							
Inspection & Test: ISO 5208						End Connection: ASME B16.25 BW							
REV.		DESCRIPTION				Draft		Check		Appr.		Date	
PONHAN PONHAN VALVE 澎瀚阀门				NPS		3/4~1		Draft		Seren.Liu		Aug.19,2025	
				CLASS		2500		Check		Lumi.Ding		Aug.19,2025	
Man.Fig.		3/4~1J-P5HP-C25B-PC V9A,F316L/517773						Appr.		Bruce.Li		Aug.19,2025	
Type								DWG		SSW20250818		A.1	