



DJ661F-25P

Emergency Shut-off Valve

Parameters

PN: 2.5MPa

DN: Ø10 ~ Ø50

Design Temp.: -196°C ~+75°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Driving Pressure: 0.4 ~ 0.7MPa


Connection: Socket Weld



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

Materials

1	Body	CF8	6	Screw	S30408	11	Hexagon Nut	S30408
2	Disc Sealing	PCTFE	7	Stem	S30408	12	Connecting Nut	S30408
3	Disc	S30408	8	V ring	PTFE	13	Connecting Pipe	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	14	Gland Packings	S30408
5	Bonnet	S30408	10	Cylinder Body & Cover	ZL104	15	Hand Wheel	Y102

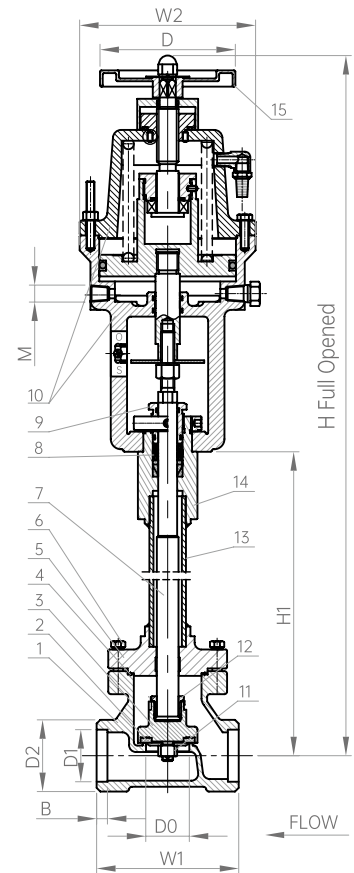

Model No.	Specifications & Dimensions (mm)										Maximum Working Pressure (MPa)	Weight(kg)
	H	H1	D	D0	D1	D2	B	W1	W2	M		
DJQ-15B1	475	175	Ø100	Ø15	Ø18.5	Ø29.5	6	65	Ø130	Rc1/4	2.5	6.2
DJQ-20B1	479	179	Ø100	Ø20	Ø25.5	Ø36	8	80	Ø130	Rc1/4	2.5	6.4
DJQ-25B1	486	186	Ø100	Ø25	Ø32.5	Ø43.5	8	90	Ø130	Rc1/4	2.5	6.6
DJQ-32B1	500	200	Ø100	Ø32	Ø38.5	Ø53	8	105	Ø130	Rc1/4	2.5	7.9
DJQ-40B1	577	223	Ø125	Ø40	Ø45.5	Ø62	8	120	Ø160	Rc1/4	2.5	12.5
DJQ-50B1	587	233	Ø125	Ø50	Ø57.5	Ø72	10	140	Ø160	Rc1/4	2.5	14.1
DJQ-15Y1	475	175	Ø100	Ø15	Ø22.2	Ø29.5	6	65	Ø130	Rc1/4	2.5	6.2
DJQ-20Y1	479	179	Ø100	Ø20	Ø27.7	Ø36	8	80	Ø130	Rc1/4	2.5	6.4
DJQ-25Y1	486	186	Ø100	Ø25	Ø34.5	Ø43.5	8	90	Ø130	Rc1/4	2.5	6.6
DJQ-32Y1	500	200	Ø100	Ø32	Ø43.2	Ø53	8	105	Ø130	Rc1/4	2.5	7.9
DJQ-40Y1	577	223	Ø125	Ø40	Ø49	Ø62	8	120	Ø160	Rc1/4	2.5	12.5
DJQ-50Y1	587	233	Ø125	Ø50	Ø61.1	Ø72	10	140	Ø160	Rc1/4	2.5	14.1