




DH61F-40T

Cryogenic Check Valve Uplift Type

Parameters

PN: 4.0MPa
DN: Ø10 ~ Ø50
Design Temp.: -196°C ~ +80°C
Media: LNG, LO₂, LN₂, LAr, CO₂

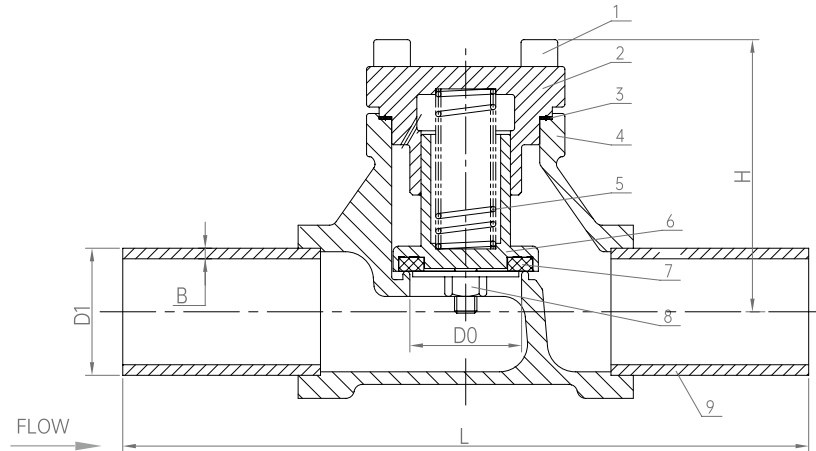

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1 Screw	S30408	4 Body	B62	7 Gasket	PTFE
2 Bonnet	C37700	5 Spring	C30210	8 Nut	C36000
3 Gasket	D#9000	6 Disc	C36000	9 Connecting Pipe	C12200

Remarks: **DH-15.99.xx**

- 05: Brass Pipe(metric system) 07: Brass Pipe(British system)
- Materials of Body and Bonnet : B62
- DN

Model No.	Specifications & Dimensions (mm)							Weight(kg)
	H	L	D0	D1 metric system	D1 British system	B	Cv	
DH-10.99.xx	55	360	13	14	17.2	1.0	2.0	
DH-15.99.xx	62	365	15	18	21.3	1.5	2.7	
DH-20.99.xx	70	380	20	25	26.9	1.5	5.5	
DH-25.99.xx	77	390	25	32	33.7	1.5	8.7	
DH-32.99.xx	89	405	32	38	42.4	1.5	15	
DH-40.99.xx	98	420	40	45	48.3	1.5	20	
DH-50.99.xx	111	440	50	57	60.3	2.0	35	