

DH11F-40P

Cryogenic Check Valve Uplift Type

Parameters


PN: 4.0MPa

DN: Ø10~Ø50

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr

Connection : Thread Connection

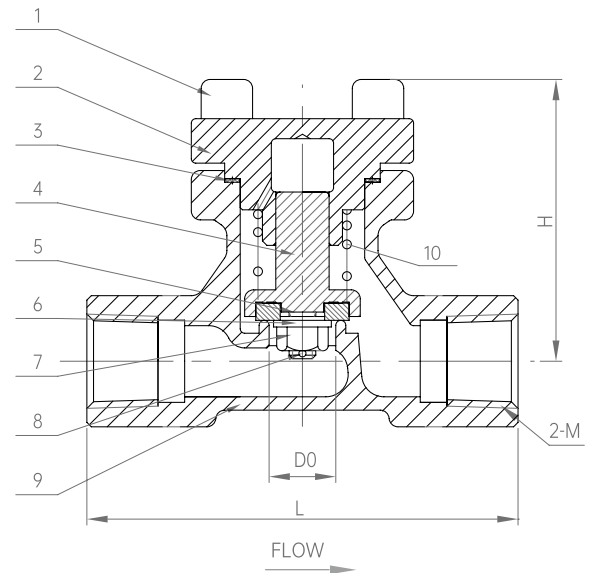

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1	Hexagon Screw	S30408	6	Gasket	S30408
2	Bonnet	CF8	7	Hexagon Nut	S30408
3	Gasket	RPTFE	8	Split pin	S30408
4	Disc	S30408	9	Body	CF8
5	Disc Sealing	PTFE	10	Spring	S30210

Model No.	Specifications & Dimensions (mm)				Weight(kg)
	H	L	D0	D1	
DH-10NPT	55	60	Ø13	NPT 3/8	
DH-15NPT	62	65	Ø15	NPT 1/2	
DH-20NPT	70	80	Ø20	NPT 3/4	