

Cryogenic Relief Valve

Parameters

PN: 4.0MPa

DN: Ø8

Design Temp.: -196℃ ~+85℃


Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.3



This kind of product has certified by CE,EAC,TS, ECE R110

Standards: GB/T 29026,EN13648:2008,TR CU 032/2013

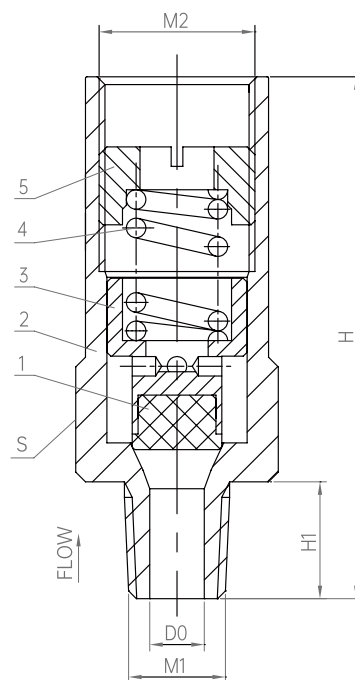

Materials

1	Gasket	PFA
2	Body	HPb59-1
3	Gate	HPb59-1
4	Spring	S30210
5	Adjusting Nut	HPb59-1

Model No.	Specifications & Dimensions (mm)						Set Pressure (Mpa)	Weight(kg)
	H	H1	D0	S	M1	M2		
DA-08C	70	15	Ø7	24	NPT 1/4	M20×1.5	0.4 ~ 1.0	0.2
DA-08C1	70	15	Ø7	24	NPT 1/4	M20×1.5	1.01 ~ 1.76	0.2
DA-08C2	70	15	Ø7	24	NPT 1/4	M20×1.5	1.77 ~ 2.4	0.2
DA-08C3	70	15	Ø7	24	NPT 1/4	M20×1.5	2.41 ~ 2.76	0.2
DA-08C5	70	15	Ø7	24	NPT 1/4	M20×1.5	2.77 ~ 4.0	0.2