

# DJ661F-40P

## Emergency Shut-off Valve

### Parameters

PN: 4.0MPa

DN: Ø10 ~ Ø50

Design Temp.: -196°C ~ +75°C


Media: LNG, LO<sub>2</sub>, LN<sub>2</sub>, LAr, CO<sub>2</sub>

Driving Pressure: 0.4 ~ 0.7MPa

Connection: Socket Weld



This kind of product has certified by CE, EAC, TS and CCS  
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

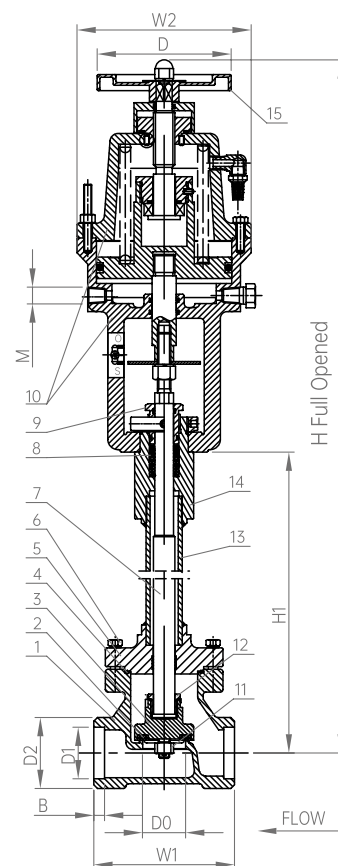

### Materials

|   |              |        |    |                       |        |    |                 |        |
|---|--------------|--------|----|-----------------------|--------|----|-----------------|--------|
| 1 | Body         | CF8    | 6  | Screw                 | S30408 | 11 | Hexagon Nut     | S30408 |
| 2 | Disc Sealing | PCTFE  | 7  | Stem                  | S30408 | 12 | Connecting Nut  | S30408 |
| 3 | Disc         | S30408 | 8  | V ring                | PTFE   | 13 | Connecting Pipe | S30408 |
| 4 | Gasket       | RPTFE  | 9  | Gland Nut             | S30408 | 14 | Gland Packings  | S30408 |
| 5 | Bonnet       | S30408 | 10 | Cylinder Body & Cover | ZL104  | 15 | Hand Wheel      | Y102   |

| Model No. | Specifications & Dimensions (mm) |     |      |     |       |       |    |     |      |       | Maximum Working Pressure (MPa) | Weight(kg) |
|-----------|----------------------------------|-----|------|-----|-------|-------|----|-----|------|-------|--------------------------------|------------|
|           | H                                | H1  | D    | D0  | D1    | D2    | B  | W1  | W2   | M     |                                |            |
| DJQ-15B2  | 475                              | 175 | Ø100 | Ø15 | Ø18.5 | Ø29.5 | 6  | 65  | Ø130 | Rc1/4 | 2.5                            | 6.2        |
| DJQ-20B2  | 479                              | 179 | Ø100 | Ø20 | Ø25.5 | Ø36   | 8  | 80  | Ø130 | Rc1/4 | 2.5                            | 6.4        |
| DJQ-25B2  | 486                              | 186 | Ø100 | Ø25 | Ø32.5 | Ø43.5 | 8  | 90  | Ø130 | Rc1/4 | 2.5                            | 6.6        |
| DJQ-32B2  | 500                              | 200 | Ø100 | Ø32 | Ø38.5 | Ø53   | 8  | 105 | Ø130 | Rc1/4 | 2.5                            | 7.9        |
| DJQ-40B2  | 577                              | 223 | Ø125 | Ø40 | Ø45.5 | Ø62   | 8  | 120 | Ø160 | Rc1/4 | 2.5                            | 12.5       |
| DJQ-50B2  | 587                              | 233 | Ø125 | Ø50 | Ø57.5 | Ø72   | 10 | 140 | Ø160 | Rc1/4 | 2.5                            | 14.1       |
| DJQ-15Y2  | 475                              | 175 | Ø100 | Ø15 | Ø22.2 | Ø29.5 | 6  | 65  | Ø130 | Rc1/4 | 2.5                            | 6.2        |
| DJQ-20Y2  | 479                              | 179 | Ø100 | Ø20 | Ø27.7 | Ø36   | 8  | 80  | Ø130 | Rc1/4 | 2.5                            | 6.4        |
| DJQ-25Y2  | 486                              | 186 | Ø100 | Ø25 | Ø34.5 | Ø43.5 | 8  | 90  | Ø130 | Rc1/4 | 2.5                            | 6.6        |
| DJQ-32Y2  | 500                              | 200 | Ø100 | Ø32 | Ø43.2 | Ø53   | 8  | 105 | Ø130 | Rc1/4 | 2.5                            | 7.9        |
| DJQ-40Y2  | 577                              | 223 | Ø125 | Ø40 | Ø49   | Ø62   | 8  | 120 | Ø160 | Rc1/4 | 2.5                            | 12.5       |
| DJQ-50Y2  | 587                              | 233 | Ø125 | Ø50 | Ø61.1 | Ø72   | 10 | 140 | Ø160 | Rc1/4 | 2.5                            | 14.1       |