

DH61F-40P

Cryogenic Check Valve Uplift Type

Parameters


PN: 4.0MPa

DN: Ø10~Ø50

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr

Connection : Socket Weld

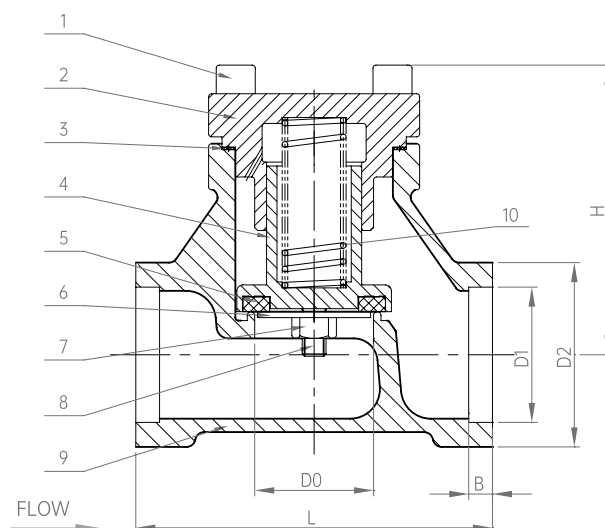

This kind of product has certified by CE, EAC, TS and CCS

Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1 Hexagon Screw	S30408	5 Disc Sealing	PTFE	8 Split pin	S30408
2 Bonnet	CF8	6 Gasket	S30408	9 Body	CF8
3 Gasket	RPTFE	7 Hexagon Nut	S30408	10 Spring	S30210
4 Disc	S30408				

Model No.	Specifications & Dimensions (mm)						Weight(kg)
	H	L	D0	D1	D2	B	
DH-10	55	60	Ø13	Ø14.5	Ø24	6	
DH-15	62	65	Ø15	Ø18.5	Ø29.5	6	0.7
DH-20	70	80	Ø20	Ø25.5	Ø36	8	1.1
DH-25	77	90	Ø25	Ø32.5	Ø43.5	8	1.4
DH-32	89	105	Ø32	Ø38.5	Ø53	8	2.3
DH-40	98	120	Ø40	Ø45.5	Ø62	8	2.9
DH-50	111	140	Ø50	Ø57.5	Ø72	10	4.4
DH-10Y	55	60	Ø13	Ø17.8	Ø24	6	
DH-15Y	62	65	Ø15	Ø22.2	Ø29.5	6	0.7
DH-20Y	70	80	Ø20	Ø27.7	Ø36	8	1.1
DH-25Y	77	90	Ø25	Ø34.5	Ø43.5	8	1.4
DH-32Y	89	105	Ø32	Ø43.2	Ø53	8	2.3
DH-40Y	98	120	Ø40	Ø49	Ø62	8	2.9
DH-50Y	111	140	Ø50	Ø61.1	Ø72	10	4.5