


Cryogenic Diverter Valve

Parameters

PN: 4.0MPa
DN: Ø15
Design Temp.: 196°C ~+80°C
Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

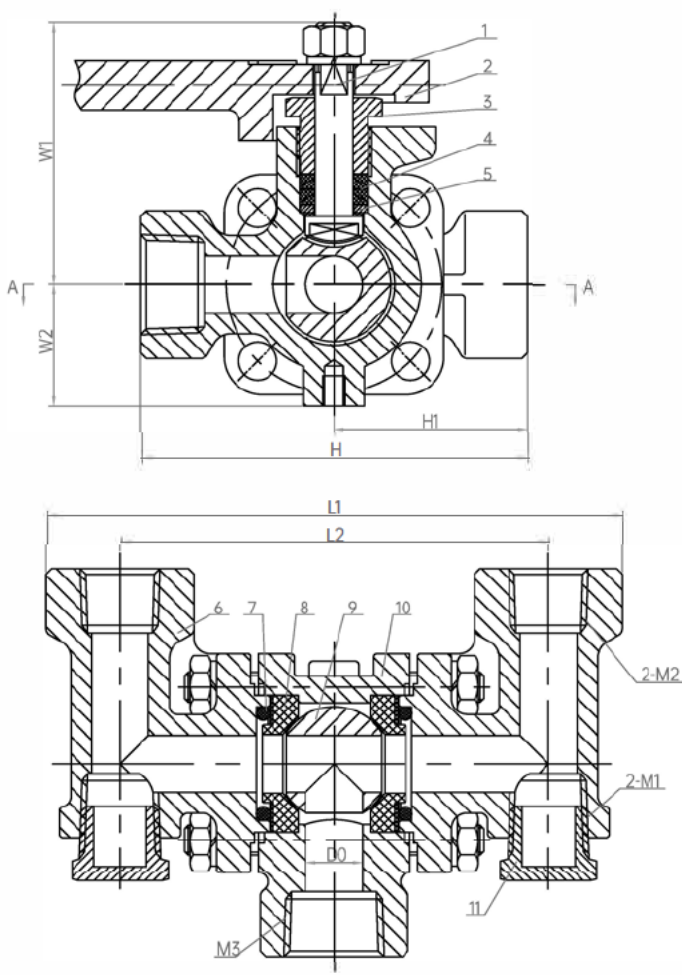

Materials

1 Stem	S30408	5 Washer	S30408	9 Ball	S30408
2 Hand Lever	CF8	6 Bonnet	CF8	10 Body	CF8
3 Gland Nut	HPb59 1	7 Gasket PTFE	PTFE	11 Screw Plug	S30408
4 Gasket	PTFE	8 Ball Lining	PTFE		

Model No.	Specifications & Dimensions (mm)										Weight(kg)
	H	H1	D0	M1	M2	M3	L1	L2	W1	W2	
DQS 15	102.5	51.5	Ø15	NPT1/2	NPT1/2	NPT3/4	152	113	69	32	2.4
DQS-15F	102.5	51.5	Ø15	NPT1/2	Rc3/4	NPT3/4	152	113	69	32	2.4