



DJ661F-40P

Emergency Shut-off Valve

Parameters

PN: 4.0MPa

DN: Ø10 ~ Ø50

Design Temp.: -196℃ ~ +75℃


Media: LNG, LO₂, LN₂, LAr, CO₂

Driving Pressure: 0.4 ~ 0.7MPa

Connection: Butt Weld



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24918, EN1626:2008, TR CU 032/2013

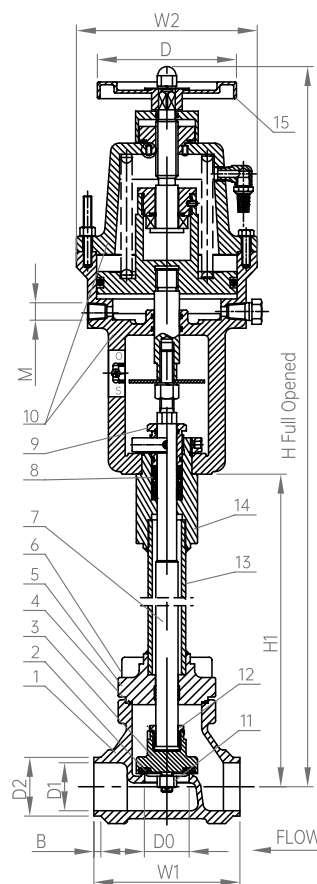

Materials

1	Body	CF8	6	Screw	S30408	11	Hexagon Nut	S30408
2	Disc Sealing	PCTFE	7	Stem	S30408	12	Connecting Nut	S30408
3	Disc	S30408	8	V ring	PTFE	13	Connecting Pipe	S30408
4	Gasket	RPTFE	9	Gland Nut	S30408	14	Gland Packings	S30408
5	Bonnet	S30408	10	Cylinder Body & Cover	ZL104	15	Hand Wheel	Y102

Model No.	Specifications & Dimensions (mm)										Maximum Working Pressure (MPa)	Weight(kg)
	H	H1	D	D0	D1	D2	B	W1	W2	M		
DJQ-15A2	475	175	Ø100	Ø15	Ø17.08	Ø21.3	5	65	Ø130	Rc1/4	2.5	
DJQ-20A2	479	179	Ø100	Ø20	Ø22.48	Ø26.7	5	80	Ø130	Rc1/4	2.5	
DJQ-25A2	486	186	Ø100	Ø25	Ø27.9	Ø33.4	5	90	Ø130	Rc1/4	2.5	
DJQ-32A2	500	200	Ø100	Ø32	Ø36	Ø42.2	5	105	Ø130	Rc1/4	2.5	
DJQ-40A2	577	223	Ø125	Ø40	Ø43	Ø48.3	5	120	Ø160	Rc1/4	2.5	
DJQ-50A2	587	233	Ø125	Ø50	Ø55	Ø60.3	5	140	Ø160	Rc1/4	2.5	
DJQ-15K2	475	175	Ø100	Ø15	Ø14	Ø18	5	65	Ø130	Rc1/4	2.5	
DJQ-20K2	479	179	Ø100	Ø20	Ø20	Ø25	5	80	Ø130	Rc1/4	2.5	
DJQ-25K2	486	186	Ø100	Ø25	Ø27	Ø32	5	90	Ø130	Rc1/4	2.5	
DJQ-32K2	500	200	Ø100	Ø32	Ø32	Ø38	5	105	Ø130	Rc1/4	2.5	
DJQ-40K2	577	223	Ø125	Ø40	Ø39	Ø45	5	120	Ø160	Rc1/4	2.5	
DJQ-50K2	587	233	Ø125	Ø50	Ø51	Ø57	5	140	Ø160	Rc1/4	2.5	