

Cryogenic Diverter Valve

Parameters

PN: 4.0MPa



DN: Ø15

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

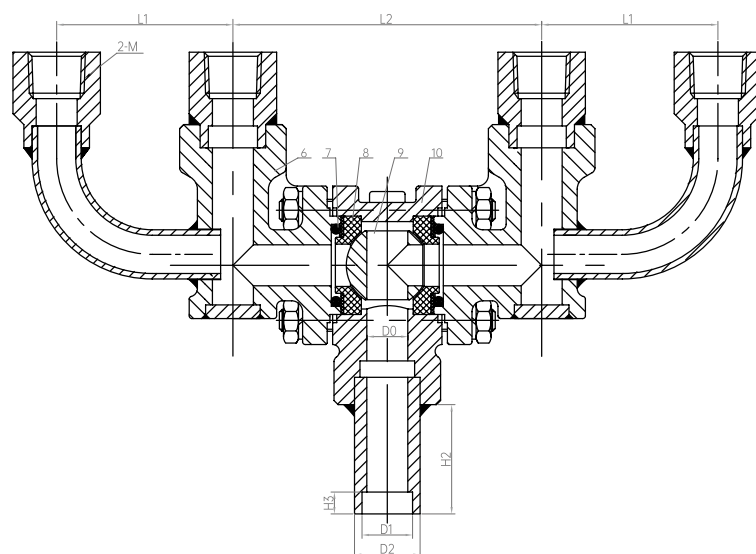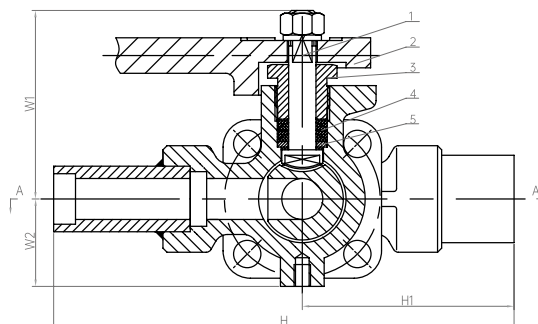

Materials

1	Stem	S30408	5	Washer	S30408	9	Ball	S30408
2	Hand Lever	CF8	6	Bonnet	CF8	10	Body	CF8
3	Gland Nut	HPb59-1	7	Gasket	PTFE			
4	Gasket	PTFE	8	Ball Lining	PTFE			

Model No.	Specifications & Dimensions (mm)												Weight(kg)
	H	H1	H2	H3	D0	D1	D2	M	L1	L2	W1	W2	
DQS-15C	169	78	40	8	Ø15	Ø18.5	Ø24	NPT1/2	64.5	113	69	32	2.4
DQS-15C1	169	78	40	8	Ø15	Ø21.5	Ø28	NPT1/2	64.5	113	69	32	2.4
DQS-15E1	169	78	40	8	Ø15	Ø21.5	Ø28	NPT1/4	64.5	113	69	32	3.2