

Cryogenic Diverter Valve

Parameters

PN: 4.0MPa



DN: Ø15

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

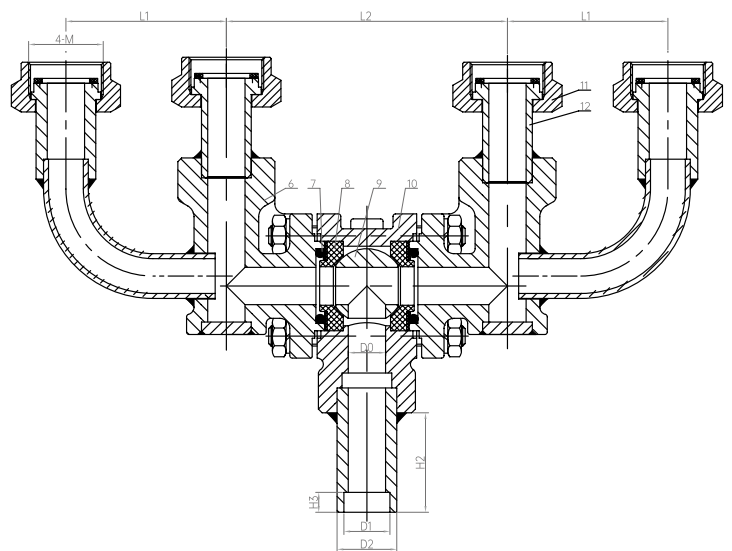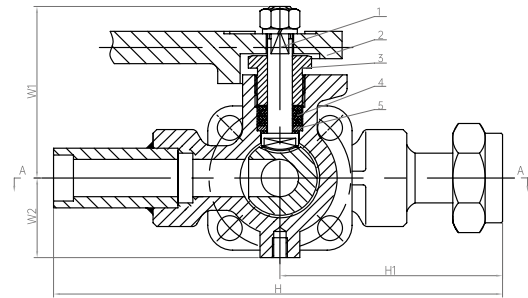

Materials

1 Stem	S30408	5 Washer	S30408	9 Ball	S30408
2 Hand Lever	CF8	6 Bonnet	CF8	10 Body	CF8
3 Gland Nut	HPb59-1	7 Gasket PTFE	PTFE	11 Hexagon Nut	HPb59-1
4 Gasket	PTFE	8 Ball Lining	PTFE	12 Pipe	S30408

Model No.	Specifications & Dimensions (mm)												Weight(kg)
	H	H1	H2	H3	D0	D1	D2	M	L1	L2	W1	W2	
DQS-15W	183	92	40	8	Ø15	Ø18.5	Ø24	M30×1.5	64.5	113	69	32	
DQS-15W1	183	92	40	8	Ø15	Ø22.5	Ø28	M30×1.5	64.5	113	69	32	