

DH61F-63P

Cryogenic Check Valve Uplift Type

Parameters


PN: 6.3MPa

DN: Ø10~Ø50

Design Temp.: -196°C ~+80°C

Media: LNG. LO₂. LN₂. LAr.

Connection : Socket Weld

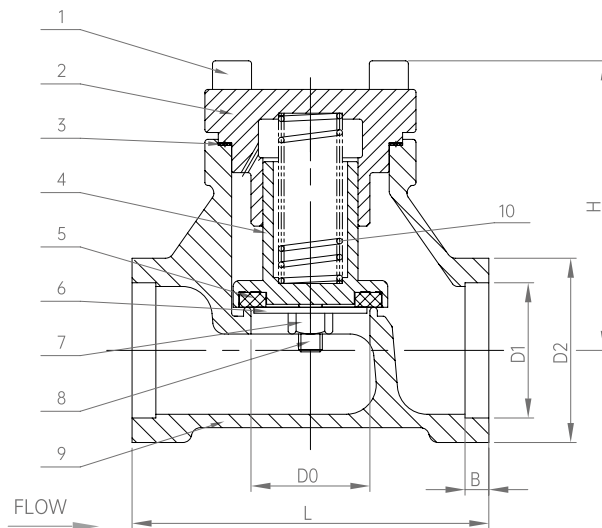

This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 24925, EN1626:2008, TR CU 032/2013

Materials

1 Hexagon Screw	S30408	5 Disc Sealing	PTFE	8 Split Pin	S30408
2 Bonnet	CF8	6 Gasket	S30408	9 Body	CF8
3 Gasket	RPTFE	7 Hexagon Nut	S30408	10 Spring	S30210
4 Disc	S30408				

Model No.	Specifications & Dimensions (mm)						Weight(kg)
	H	L	D0	D1	D2	B	
DH-10L	55	60	Ø13	Ø14.5	Ø24	6	
DH-15L	62	65	Ø15	Ø18.5	Ø29.5	6	
DH-20L	70	80	Ø20	Ø25.5	Ø36	8	
DH-25L	77	90	Ø25	Ø32.5	Ø43.5	8	
DH-32L	89	105	Ø32	Ø38.5	Ø53	8	
DH-40L	98	120	Ø40	Ø45.5	Ø62	8	
DH-50L	111	140	Ø50	Ø57.5	Ø72	10	
DH-10YL	55	60	Ø13	Ø17.8	Ø24	6	
DH-15YL	62	65	Ø15	Ø22.2	Ø29.5	6	
DH-20YL	70	80	Ø20	Ø27.7	Ø36	8	
DH-25YL	77	90	Ø25	Ø34.5	Ø43.5	8	
DH-32YL	89	105	Ø32	Ø43.2	Ø53	8	
DH-40YL	98	120	Ø40	Ø49	Ø62	8	
DH-50YL	111	140	Ø50	Ø61.1	Ø72	10	