

Cryogenic Relief Valve

Parameters

PN: 4.0MPa

DN: Ø8

Design Temp.: -196℃ ~+85℃

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.3




This kind of product has certified by CE,EAC,TS, ECE R110

Standards: GB/T 29026,EN13648:2008,TR CU 032/2013

Materials

1	Gasket	PFA
2	Body	HPb59-1
3	Gate	HPb59-1
4	Spring	S30210
5	Adjusting Nut	HPb59-1

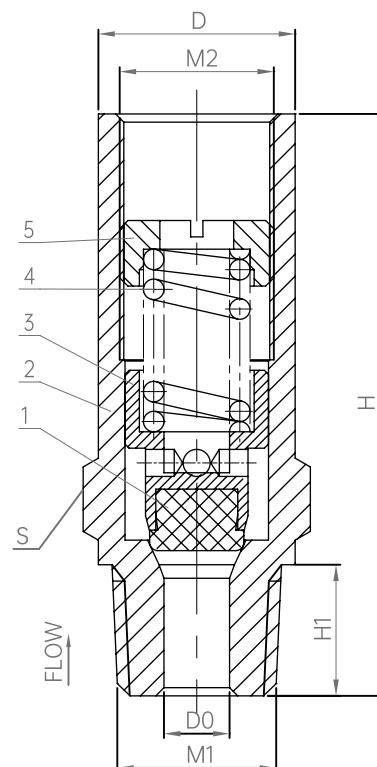

Model No.	Specifications & Dimensions (mm)						Set Pressure (Mpa)	Weight(kg)
	H	H1	D0	S	M1	M2		
DA-08G	71	16	Ø8	24	NPT 1/2	3/4-20UNEF	0.4 ~ 1.0	0.1
DA-08G1	71	16	Ø8	24	NPT 1/2	3/4-20UNEF	1.01 ~ 1.76	0.1
DA-08G2	71	16	Ø8	24	NPT 1/2	3/4-20UNEF	1.77 ~ 2.4	0.1
DA-08G3	71	16	Ø8	24	NPT 1/2	3/4-20UNEF	2.41 ~ 2.76	0.1
DA-08G5	71	16	Ø8	24	NPT 1/2	3/4-20UNEF	2.77 ~ 4.0	0.1