

Cryogenic Safety Valve

Parameters

PN: 4.0MPa

DN: Ø15


Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Flow Coefficient: 0.29



This kind of product has certified by CE, EAC, TS and CCS
Standards: GB/T 29026, EN13648:2008, TR CU 032/2013

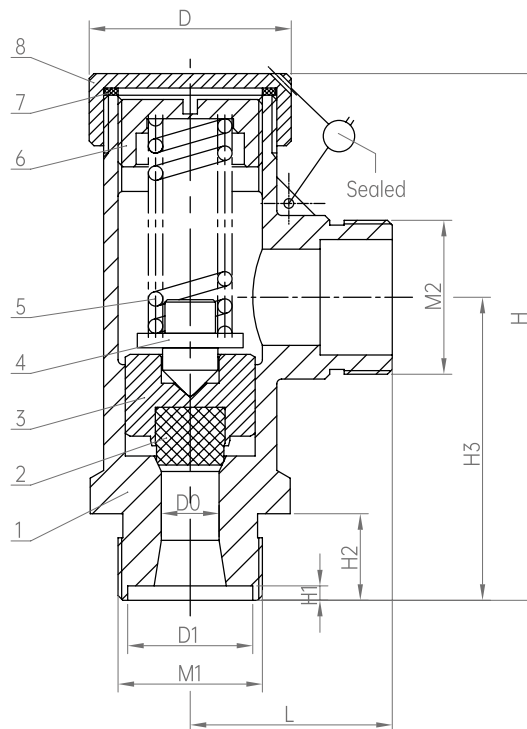

Materials

1	Body	CF8	5	Spring	S30210
2	Gasket	PTFE+MoS2	6	Adjusting Nut	HPb59-1
3	Disc	HPb59-1	7	Gasket	PTFE
4	Spring Seat	HPb59-1	8	Cover	S30408

Model No.	Specifications & Dimensions (mm)										Set Pressure (MPa)	Weight(kg)
	H	H1	H2	H3	M1	M2	L	D	D0	D1		
DA-15	109	3	18	63	M30x1.5	M32x1.5	42	Ø42	Ø12	Ø26	1.21 ~ 2.0	0.9
DA-15A											0.4 ~ 1.2	0.9
DA-15A1											0.25 ~ 0.39	0.9
DA-15A3											2.01 ~ 3.5	0.9