

High Pressure Cryogenic Check Valve

Parameters


PN: 32MPa

DN: Ø10~Ø25

Design Temp.: -196°C ~+80°C

Media: LNG, LO₂, LN₂, LAr, CO₂

Connection : Socket Weld

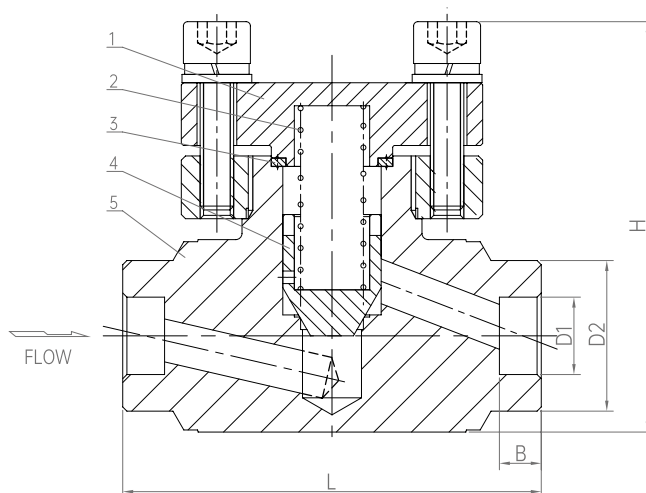

Materials

1 Bonnet S30408

2 Spring S30210

3 Gasket T2

4 Disc S30408

5 Body S30408

Model No.	Specifications & Dimensions (mm)						Weight(kg)
	H	L	B	D0	D1	D2	
DGH-10	98	100	10	Ø10	Ø18.5	Ø36	
DGH-15	98	100	12	Ø15	Ø22.5	Ø36	
DGH-20	98	100	12.5	Ø20	Ø27.5	Ø36	
DGH-25	120	128	12.5	Ø25	Ø32.5	Ø46	